

SPECIFICATION SHEET : **NPY-120-154-T5**

This Is An Original Product From Fulham Co., Inc

Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,
*** Meets Energy Star 4.0 Criteria For Applications Listed.**

This Ballast Will Operate Following Lamps.




F54T5HO

ELECTRICAL DATA

INPUT VOLT: 120V \pm 10%, 50/60Hz									
LAMP WATTS/TYPE	F54T5HO	-	-	-	-	-	-	-	-
LAMPS OPERATED	1								
INPUT WATTS	58.95								
LINE CURRENT:	0.830								
POWER FACTOR	0.590								
BALLAST FACTOR	0.999								
EFFICACY FACTOR	1.695								
THD	126.90								
CURRENT CREST FACTOR	1.497								
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	EOL								
BALLAST OPERATING TEMP	MINI. -10 $^{\circ}$ C (14 $^{\circ}$ F)								
MAX. CASE TEMP	75 $^{\circ}$ C (167 $^{\circ}$ F)								
ENERGY STAR 4.0	YES								
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								


MECHANICAL DATA

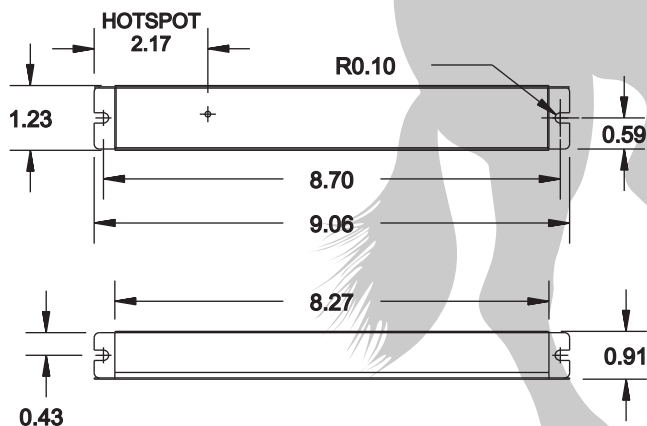

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 \pm 1"	12 \pm 1"	36 \pm 1"	36 \pm 1"		

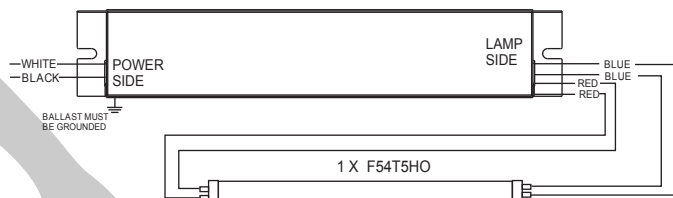

NOTE : This Ballast Case Must Be Grounded