



# KT-LED36HID-E26-830-D HID REPLACEMENT LED LAMP

## **DESCRIPTION**

36W HID Replacement LED Lamp | 3000K | > 80 CRI | IP64 Rated

| LAMP TYPE: HID Replacement LED   |
|----------------------------------|
| BASE TYPE: E26 (Medium)          |
| WATTAGE: 36W                     |
| COLOR TEMPERATURE: 3000K         |
| METAL HALIDE EQUIVALENT: 150W    |
| COLOR RENDERING INDEX (CRI): >80 |
| WARRANTY: 5 Years                |



## **PRODUCT FEATURES**

- Replacement for conventional metal halide lamp
- 50.000 + hour lifetime
- Environmentally friendly: No mercury used
- Instant startup
- UL listed
- Suitable for use in fully enclosed fixture. Minimum lamp compartment dimensions: 8in x 8in x 9in
- Operating temperature: -40°C/-40°F to 60°C/140°F
- Integral driver, eliminates the need for external driver or ballast; includes 4kV surge protection
- IP64 rated; integrated heat sink quickly dissipates heat and guides water intrusion out of the lamp
- Do not use with standard dimmers. Not compatible with phase dimmers. Dimming functions with sensors only

### **OPERATING SPECIFICATIONS**

# **ELECTRICAL CHARACTERISTICS**

| Input Voltage | Power Consumption | Power<br>Factor | Input Current                |
|---------------|-------------------|-----------------|------------------------------|
| 120-277Vac    | 36W               | >0.9            | 0.30A @ 120V<br>0.13A @ 277V |

# PHOTOMETRIC CHARACTERISTICS

| Color Temperature (CCT)     | 3000K    |
|-----------------------------|----------|
| Luminous Flux               | 5040 lm  |
| Color Rendering Index (CRI) | >80      |
| Efficacy                    | 140 lm/W |
| Visible Light Area          | 360°     |

# **SMART PORT**




On the top of the lamp is a low-voltage AUX port for lamp level sensor controls which are coming soon, Q2+ 2019.


### **RATED LIFE**

| L70 (Hours) | 50,000 |
|-------------|--------|
|             |        |

#### SPECTRAL DISTRIBUTION

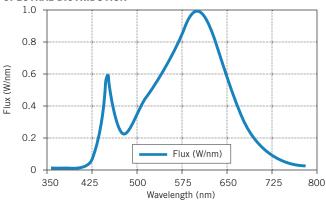

### **LUX DISTANCE CURVE**

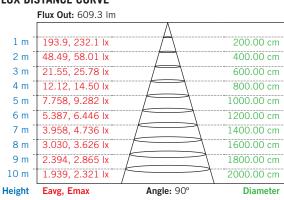






# KT-LED36HID-E26-830-D /G3 HID REPLACEMENT LED LAMP

# WIRING INSTRUCTIONS

### STEP 1

Disconnect power. Disconnect and remove existing ballast, capacitor, and/or ignitor (where applicable) from fixture.

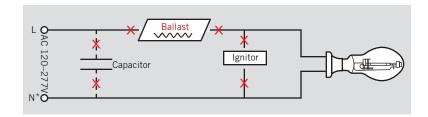


### STEP 2


Rewire for line voltage to the lamp socket. Lamp is compatible with 120-277V from single phase, three phase wye, and three phase delta systems.



### STEP 3


Install new LED replacement lamp. Ensure lamp is operating properly when power is turned on.




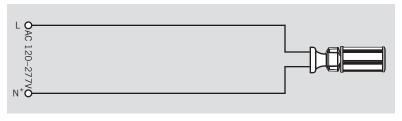

\*or other line for certain three phase systems such as 120/208 three phase wye systems

# PHYSICAL CHARACTERISTICS

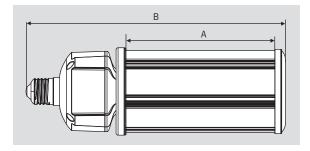



# **LAMP DIMENSIONS**

| A (Illuminated Length) | 5.66" |
|------------------------|-------|
| B (Body Length)        | 7.95" |
| C (Diameter)           | 3.34" |

BASE TYPE: E26 (Medium)





# KT-LED36HID-E26-830-D /G3

HID REPLACEMENT LED LAMP

# **ORDERING INFORMATION**

| ORDER CODE                   | PACK QTY. | EASY CODE | UPC          |
|------------------------------|-----------|-----------|--------------|
| KT-LED36HID-E26-830-D /G3-DP | 16        | GYL-73    | 843654123004 |

### **CATALOG NUMBER BREAKDOWN**

KT-LED36HID-E26-830-D /G3-DP

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Type
- 5 Base Type
- **6** 800 Series
- 7 Color Temperature
- 8 Direct-Drive Series
- 9 Generation
- 10 Packaging Style