

Project:

Type:

Prepared By:

Date:



UPC: 019813749822



Features and Benefits

Replacement for High output incandescent/halogen or ceramic metal halide HID Lamps

Commercial Grade

Large metal heatsink for optimal heat dissipation

In HID retrofit applications - Integral Driver enables lamp to be wired directly to line voltage. Must bypass ballast

Produces rich and vibrant colors >90CRI

Energy efficient replacement for incandescent and halogen PAR lamps

Constructed from durable materials which lowers risk of breakage

Rated for use in enclosed and open fixtures in dry and damp locations

Single optic and full face lens for precise beam angle control

Longer lifespan compared to legacy equivalents minimizes replacement and maintenance costs

Title 20 Compliant, Energy Star Compliant, UL Listed

Non-dimmable

Technical Specifications

Performance

Product Type:

HID

Input Wattage:

26W

Typical Lumen Output:

2400

Efficacy:

92 lm/W

Color Temperature:

3000K Warm White

CRI:

90

L70 Lifespan:

40,000 Hours

Dimmable:

No

Construction

Bulb Shape:

PAR38

Base Type:

E26

Beam Angle:

40°

Technical Specifications

R9 Value:

>50

For Use in Emergency Fixtures:

No

For Use Outdoors in Open Fixtures:

No

Electrical

Power Factor:

0.9

Operating Temperature:

-20°C - 45°C

Input Voltage:

120-277V

Technical Specifications (continued)

Electrical

Operating Frequency:

60 Hz

Other

Warranty (Years):

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of four (4) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Electrical Characteristics

Input Current @ 120V:

225mA

Input Current @ 277V:

105mA

Flicker:

<30%

Compliance

UL Listed:

Yes

ENERGY STAR V2.0:

This product is ENERGY STAR® Version 2.0 Certified

Energy Star ID:

2330062


CEC Status:

Lawful for sale in California

Case and Pallet Dimensions

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	6	15.1	10.2	6.1
PALLET	360	45.4	35.5	48.5

Dimension

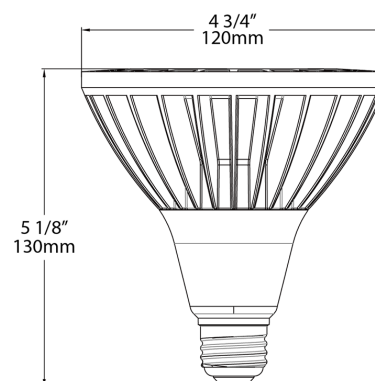

Light Distribution

